

FROM THE FOUNDER OF THE #VIKISEWS BRAND




Back in 2016, when I was working on my first set of sewing instructions, I was trying to write them in such a way that even a complete beginner could easily understand and use them to create their very first garment. These instructions laid the foundation for the Vikisews brand, its vision and its mission. I wanted to create modern patterns with the utmost detailed and clear instructions.

Now, with each new collection we are constantly improving our instructions, amending them and adding more relevant details. By the time the final product reaches you, our drafters, correctors, and editors would have spent weeks perfecting every word and every photograph. If you compile a few of our instructions together, you will get a sewing manual that will assist you in sewing all kinds of garments at any difficulty level.

And I would be very happy if these instructions helped you to turn your hobby into a lifelong passion... Enjoy the process! Create your ultimate dream wardrobe! Wear your garments proudly for years to come!

If you have any questions, please contact us at info@vikisews.com — we are always there to help.

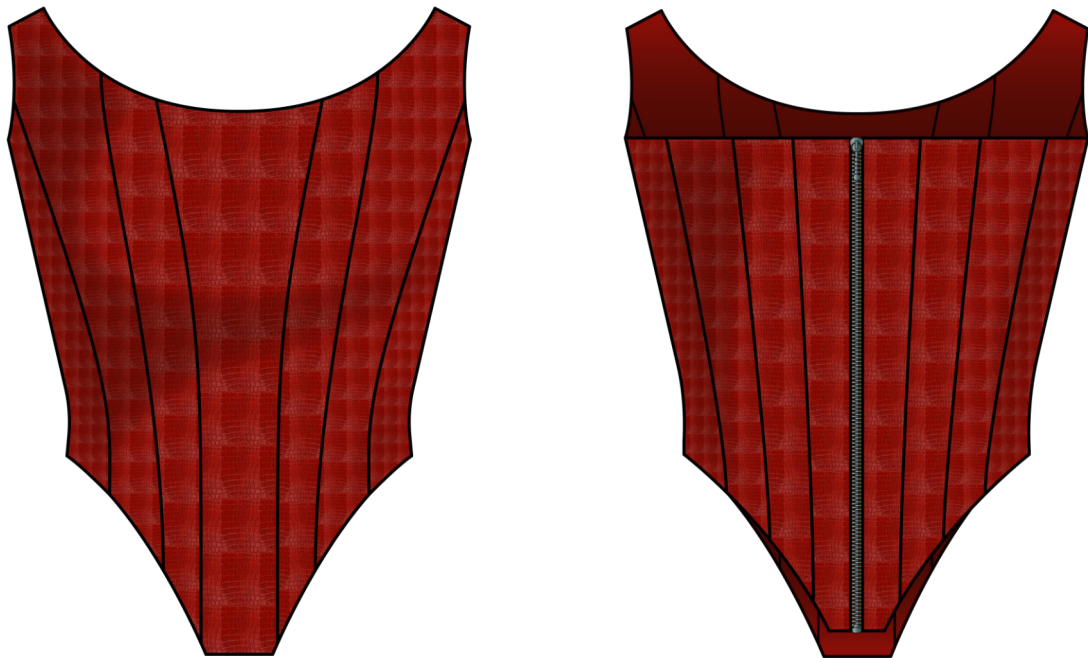

HAYET PATTERN DESCRIPTION

Hayet is a close-fitting corset top. It features shaped princess seams at the front and back. All the front and back seams are stiffened with rigilene boning. The corset top fastens with a separating zipper in the center back seam. The upper edge and hem are both curved at the front and back. Hayet is fully lined and below-waist length.



IMPORTANT!

The contents of this pattern are copyright protected and belong exclusively to Vikisews. You may use Vikisews patterns for personal use. It is prohibited to share Vikisews patterns and instructions with third parties, as well as to publish patterns and instructions online for public access. According to part 1 of clause 1252 and clause 1301 of the Civil Code of the Russian Federation, failure to comply with the mentioned rules constitutes a breach of the legislation in force in the field of copyright and entails liability of the violator. Illegal use or distribution will be prosecuted in accordance with legislation.

You may use Vikisews patterns for commercial use, to sew custom-made garments and/or create fashion collections, on the condition that the patterns are solely used in a manufacturing setting and are not further shared with individuals.

TOTAL EASE ALLOWANCE

	Bust ease	Waistline ease
cm	-3.3 – -2.3	-2 – -3
inches	-1 1/4 – -7/8	-3/4 – -1 1/8

GARMENT LENGTH

Height, cm	Garment length at center back from waist down, cm	Garment length at center front from waist down, cm
1 (154–160)	11.7–15.6	13.1–16.2
2 (162–168)	12.5–16.4	14.1–17.2
3 (170–176)	13.5–17.4	15.1–18.2
4 (178–184)	14.5–18.4	16.1–19.2

Height, ft	Garment length at center back from waist down, in	Garment length at center front from waist down, in
1 (5'1"–5'3")	4 5/8–6 1/8	5 1/8–6 3/8
2 (5'4"–5'6")	4 7/8–6 1/2	5 1/2–6 3/4
3 (5'7"–5'9")	5 3/8–6 7/8	6–7 1/8
4 (5'10"–6'1")	5 3/4–7 1/4	6 3/8–7 1/2

SUGGESTED FABRIC

To sew this corset top, choose fabrics with the following properties:

- medium weight, soft, non-stretch or with very little stretch, opaque
- the fiber content can include polyurethane, polyvinyl chloride (PVC) with a knit or woven backing
- the following fabrics are recommended: faux leather, faux suede

Attention! We do not recommend stretchy knit fabrics and lightweight sheer fabrics (chiffon, organza, stretch lace).

For the lining, choose lining fabrics made of artificial fibers (viscose), blends (viscose + elastane, viscose + polyester), or synthetics (polyester, polyester + elastane).

The corset top in the photo is made of faux leather. The fabric is medium weight, easily pressed and steamed, soft, with very little stretch and a knit backing, the wrong side has a suede effect. The fiber content is a blend of polyester and polyurethane.

The lining is 100% viscose.

PATTERN PIECES LIST

1. From main fabric:

- front piece 1 — cut 1 on fold
- front piece 2 — cut 2
- front piece 3 — cut 2
- front piece 4 — cut 2
- back piece 1 — cut 2
- back piece 2 — cut 2
- back piece 3 — cut 2
- back piece 4 — cut 2
- zipper placket — cut 1
- top front facing — cut 1 on fold
- top back facing — cut 2
- back hem facing — cut 2
- front hem facing — cut 1 on fold

2. From lining fabric:

- front piece 1 lining — cut 1 on fold
- front piece 2 lining — cut 2
- front piece 3 lining — cut 2
- front piece 4 lining — cut 2
- back piece 1 lining — cut 2
- back piece 2 lining — cut 2
- back piece 3 lining — cut 2
- back piece 4 lining — cut 2

3. From interfacing:

- front piece 1 — cut 1 on fold
- front piece 2 — cut 2
- front piece 3 — cut 2
- front piece 4 — cut 2
- back piece 1 — cut 2
- back piece 2 — cut 2
- back piece 3 — cut 2
- back piece 4 — cut 2
- zipper placket — cut 1
- top front facing — cut 1 on fold
- top back facing — cut 2
- back hem facing — cut 2
- front hem facing — cut 1 on fold

***IMPORTANT!** Don't forget to transfer all pattern markings and notches onto the fabric.*

SEAM ALLOWANCES


All pattern pieces include seam allowances as follows:

- center back seam allowance — 1.5 cm (5/8")
- all other edges — 1 cm (3/8")


Take this into account when laying out pattern pieces on the fabric.



Place front piece 3 and front piece 4 right sides together, align the princess seam edges. Match the notches and pin. Stitch on the sewing machine, backstitching at the beginning and end.

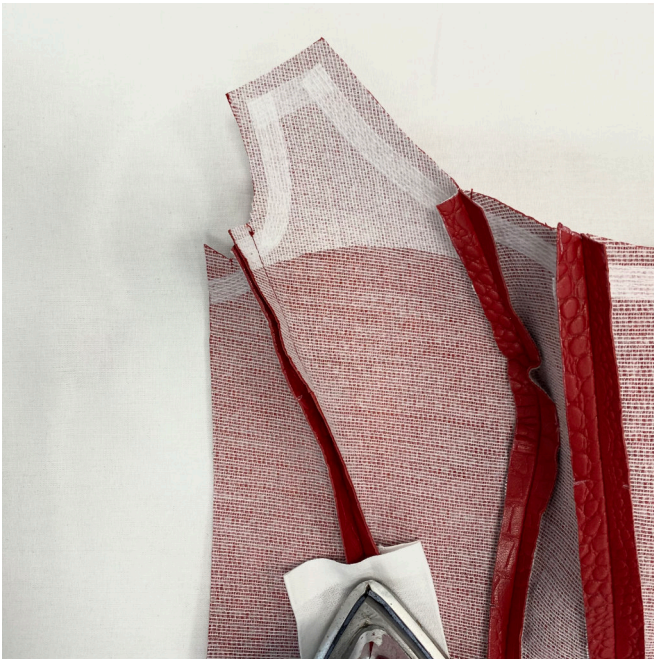

Press the seams flat. Press the seam allowances open using a pressing cloth. Press the seam allowances down with a tailor's clapper and let them cool down.

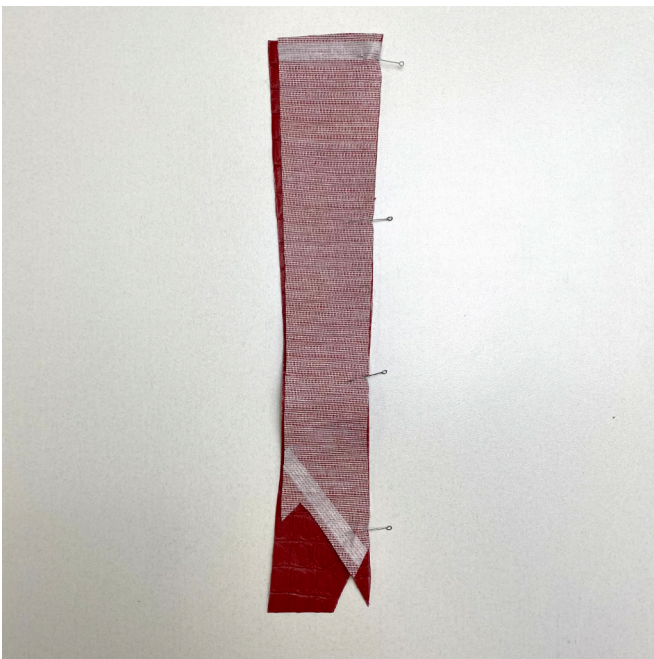

Place back piece 1 and back piece 2 right sides together, align the princess seam edges. Match the notches and pin. Stitch on the sewing machine, backstitching at the beginning and end.